

ESD1.8V88D-CDN

ROHS

Transient Voltage Suppressors for ESD Protection

Description



www.unsemi.com.tw

The ESD1.8V88D-CDN is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

Features


- ◆ 153 Watts Peak Pulse Power per Line (tp=8/20μs)
- ◆ Protects One Bidirectional I/O Line
- ◆ Low Clamping Voltage
- ◆ Working voltages : 1.8V
- ◆ Low leakage current
- ◆ IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ IEC61000-4-5 (LIGHTING) 18A (8/20μs)
- ◆ IEC61000-4-2(ESD):±30kV (air discharge) ±30kV (contact discharge)

Applications

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Notebooks, Desktops, and Servers
- ◆ Portable Instrumentation
- ◆ Peripherals
- ◆ Personal Digital Assistants
- ◆ Keypads, Side Keys, Audio Ports
- ◆ Digital Lines



Functional Diagram

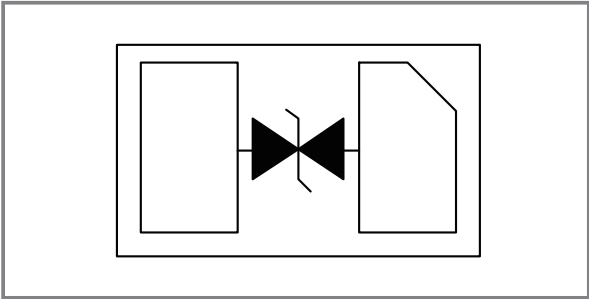

Mechanical Data

- ◆ SOD-882/DFN1006 (1.0x0.6x0.5mm) Package
- ◆ Molding Compound Flammability Rating : UL 94V-O
- ◆ Weight 0.5 Milligrams (Approximate)
- ◆ Lead Finish : Lead Free

Mechanical Characteristics

Parameter	Symbol	Value	Units
Peak Pulse Power (Tp=8/20μs waveform)	PPP	153	Watts
Lead Soldering Temperature	TL	260 (10 sec.)	°C
Storage Temperature Range	TSTG	-55 to +150	°C
Operating Junction Temperature Range	TJ	-40 to +125	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified)

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Reverse Working Voltage	V_{RWM}	--	--	--	1.8	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$;	2.3	--	--	V
Reverse Leakage Current	I_R	$V_{RWM}=1.8V$, $T=25^\circ C$;	--	--	0.5	μA
Clamping Voltage	V_C	$I_{PP}=1A$, $T_P=8/20\mu s$;	--	--	3.6	V
		$I_{PP}=18A$, $T_P=8/20\mu s$;	--	--	8.5	V
Junction capacitance	C_J	$V_R=0V$, $f=1MHz$;	--	25	--	pF

Characteristic Curves

Fig1. 8 x 20 μs Pulse Waveform

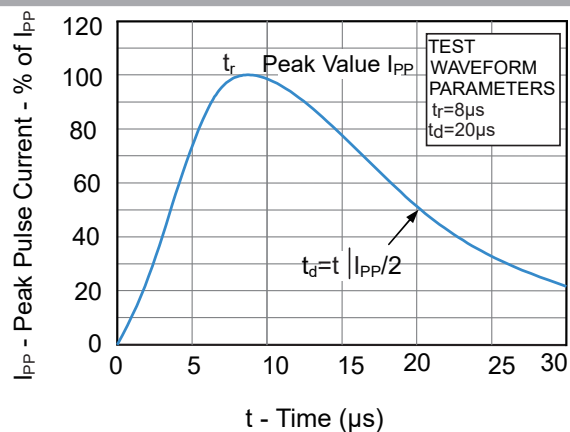


Fig2. Power Derating Curve

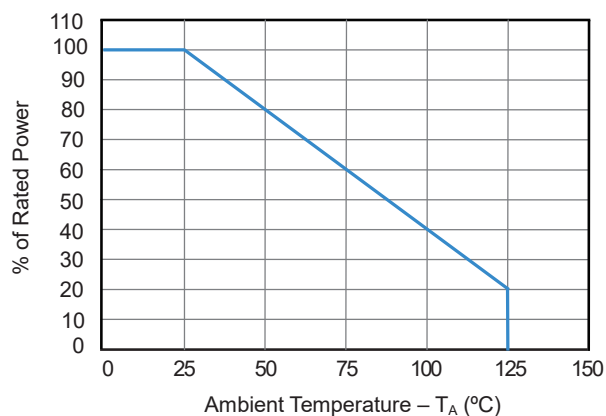


Fig3. ESD Pulse Waveform (according to IEC 61000-4-2)



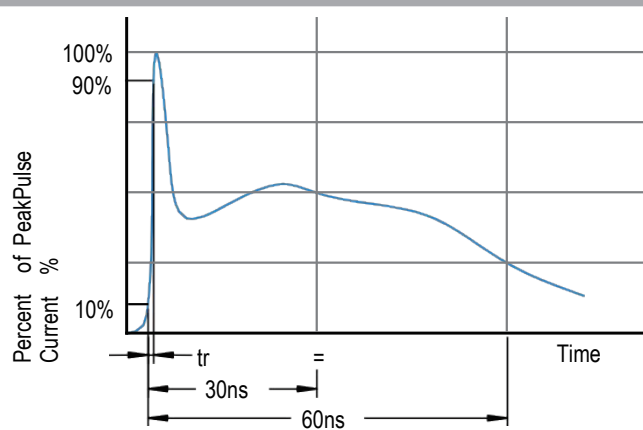


Fig4. Clamping Voltage vs. Peak Pulse Current

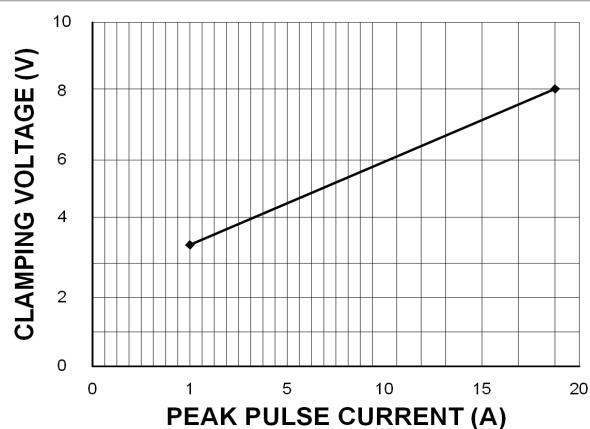



Characteristic Curves

Fig5. Typic Reverse Leakage vs. Temperature

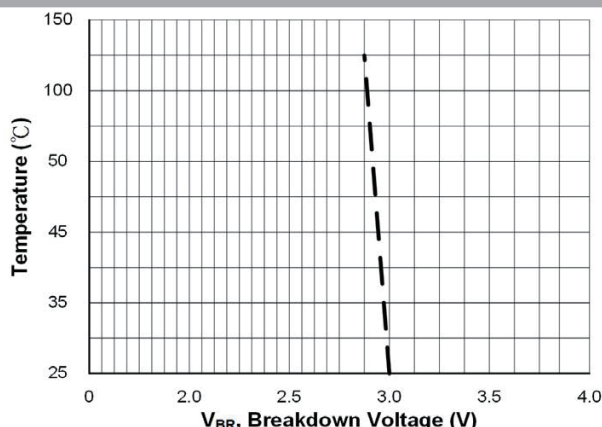


Transmission Line Pulse (TLP)

Transmission Line Pulse (TLP) is a measurement technique used in the Electrostatic Discharge (ESD) arena to characterize performance attributes of devices under ESD stresses. TLP is able to obtain current versus voltage (I-V) curves in which each data point is obtained with a 100ns long pulse, with currents up to 40 A. TLP was first used in the ESD field to study human body model (HBM) in integrated circuits, but it is an equally valid tool in the field of system level ESD. The applicability of TLP to system level ESD is illustrated in Figure 1, which compares an 8KV IEC 61000-4-2 current waveform with TLP current pulses of 8 and 16 A. The current levels and time duration for the pulses are similar and the initial rise time for the TLP pulse is comparable to the rise time of the IEC 61000-4-2's initial current spike. This application note will give a basic introduction to TLP measurements and explain the data sheet parameters extracted from TLP for SDI Technology's protection products.

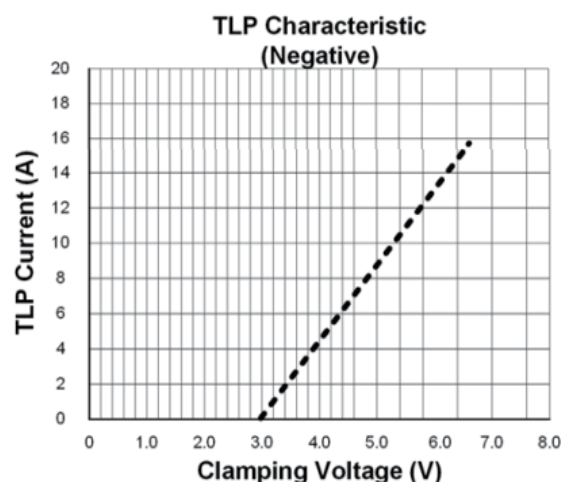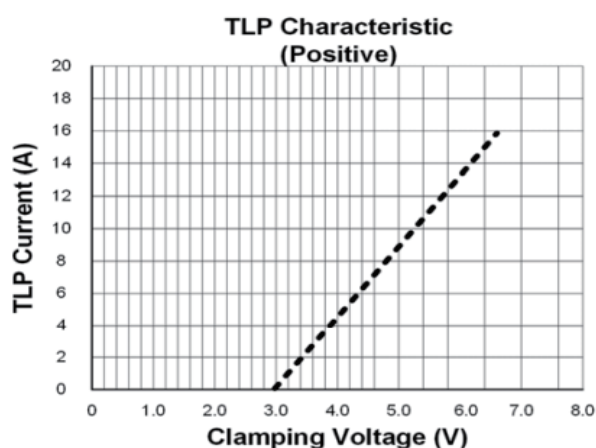


SOD-882/DFN1006 Package Outline & Dimensions

SOD-882/DFN1006

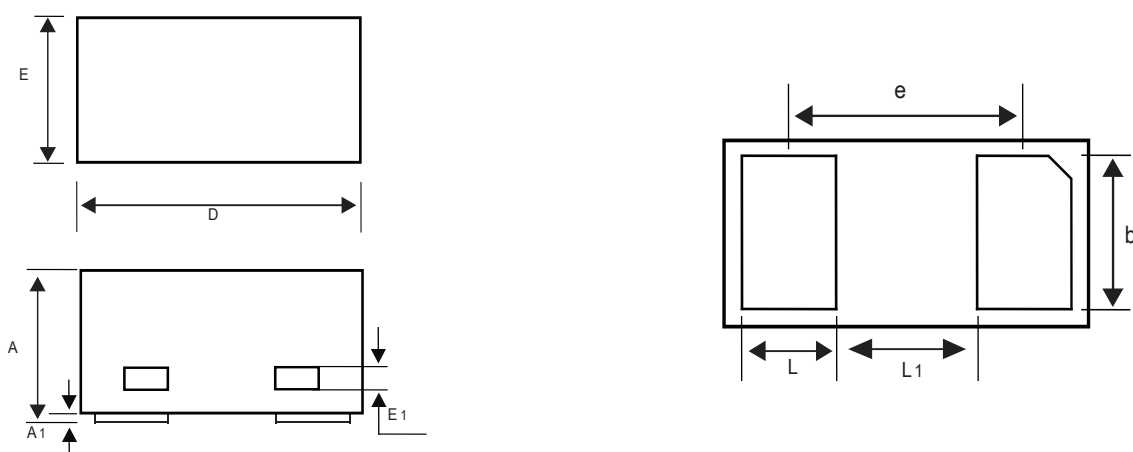

Suggested PAD Layout

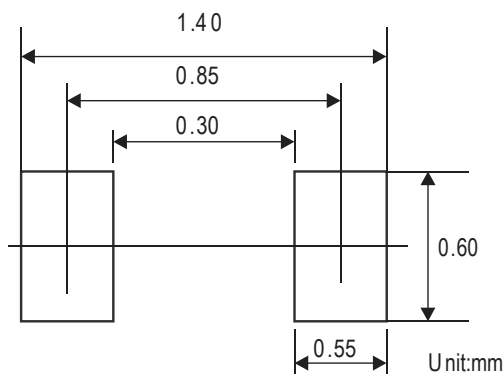

Symbol	Millimeters		
	Min.	Nom	Max.
A	0.450	0.500	0.550
A1	0	0.020	0.050
E1	0.013	0.063	0.113
D	0.900	1.000	1.100
E	0.500	0.600	0.700
e	0.65BSC		
L	0.150	0.250	0.350
b	0.400	0.500	0.600
L1	0.300	0.400	0.500

Ordering Information

Device	Marking	Package	Quantity	Reel Size
ESD1.8V88D-CDN	TD	SOD-882/DFN1006	10,000pcs/Ree	7 inch

Disclaimer

UNSEMI RESERVES THE RIGHT TO MAKE CHANGE ON OUR PRODUCTS , PRODUCTS SPECIFICATION AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

UN SEMICONDUCTOR LIMITED its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "UNSEMI") does not give any representations or warranties for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In no event shall UNSEMI be liable for any indirect, incidental, punitive, special or consequential damages (including any and all implied warranties, warranties of fitness for particular purpose, non-infringement and merchantability.) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Statements regarding the suitability of products for certain types of applications are based on UNSEMI knowledge of typical requirements that are often placed on UNSEMI products in generic applications. Such statements are not binding, statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify UNSEMI's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise agreed in writing, UNSEMI product is not designed, authorized or warranted to be suitable for use in medical life-saving, or life-sustaining application , nor in applications where failure or malfunction of a UNSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. UNSEMI and its suppliers accept no liability for inclusion or use of UNSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All referenced brands, product names, service names and trademarks are the property of their respective owners.