

ESD2.5V02D-C

ROHS

Transient Voltage Suppressors for ESD Protection

Description

The ESD2.5V02D-C is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space is at a premium.

Features

- ◆ Protects One Bidirectional I/O Line
- ◆ Low Clamping Voltage
- ◆ Surface mount package.
- ◆ Ultra small SMD package.
- ◆ Stand-off Voltage: 2.5 V
- ◆ Low leakage current
- ◆ 161 Watts Peak Pulse Power per Line ($t_p=8/20\mu s$)
- ◆ IEC61000-4-5 (LIGHTING) 17A (8/20 μs)
- ◆ Provides ESD protection to IEC61000-4-2(ESD):
 - ±30kV (air discharge)
 - ±30kV (contact discharge)

Applications


- ◆ Cell Phone Handsets and Accessories
- ◆ I²C Bus Protection
- ◆ Personal Digital Assistants (PDA)
- ◆ Notebooks, Desktops, and Servers
- ◆ Micro controller Input Protection
- ◆ Peripherals
- ◆ Parallel & Serial Port Protection

Mechanical Characteristics


Parameter	Symbol	Value	Units
Peak Pulse Power ($T_p=8/20\mu s$ waveform)	P_{pp}	161	Watts
Lead Soldering Temperature	T_L	260 (10 sec.)	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Operating Junction Temperature Range	T_J	-40 to +125	°C



www.unsemi.com.tw

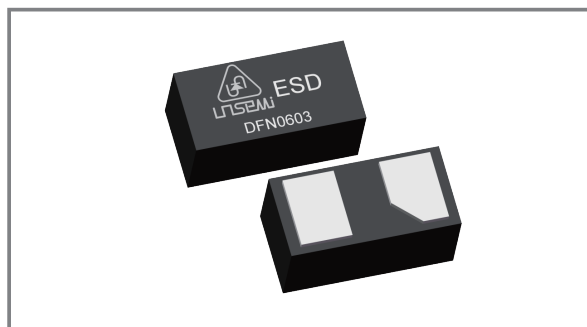

Functional Diagram

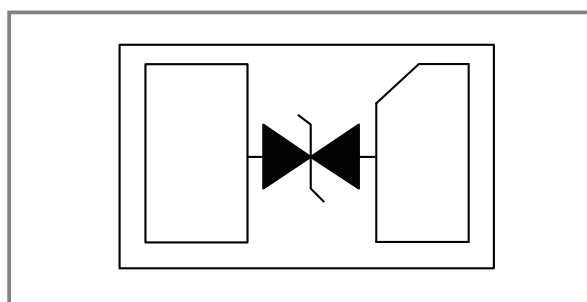

Mechanical Data

- ◆ Case: 0201/DFN0603 package, molded plastic.
- ◆ Molding Compound Flammability Rating : UL 94V-O
- ◆ Weight 0.3 Milligrams (Approximate)
- ◆ Mounting position: Any

Electrical Characteristics @ 25°C Unless Otherwise Specified)

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Reverse Working Voltage	V_{RWM}	--	--	--	2.5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	3.2	--	--	V
Reverse Leakage Current	I_R	$V_{RWM}=2.5V$; $T=25^\circ C$	--	--	0.1	μA
Junction Capacitance	C_J	$V_R=0V$, $f=1MHz$;	--	23	--	pF
Clamping Voltage	V_C	$I_{PP}=17A$, $T_P=8/20\mu s$;	--	--	9.5	V
TLP Clamping Voltage	V_{CL}	$I_{PP}=1A$	--	4.5	--	V
		$I_{PP}=8A$	--	6.0	--	V
		$I_{PP}=16A$	--	7.0	--	V

Characteristic Curves

Fig1. 8/20 μs Pulse Waveform

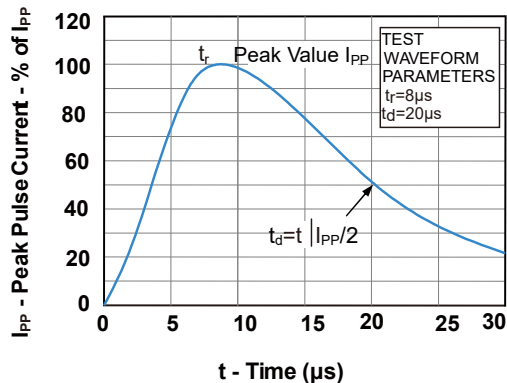


Fig2. Power Rating Derating Curve

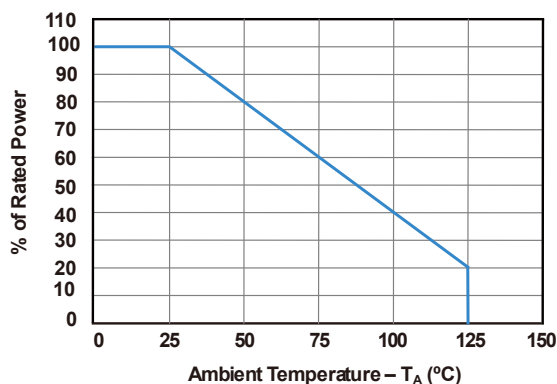


Fig3. Clamping Voltage vs. Peak Pulse Current




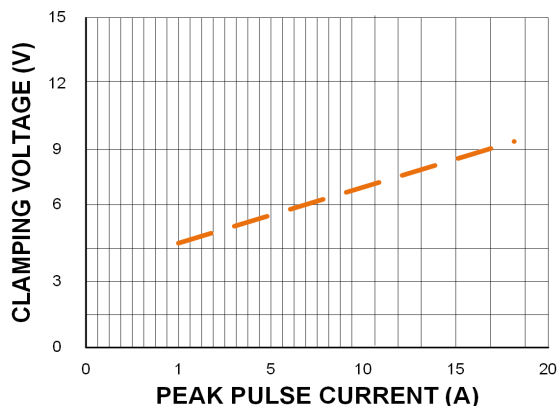


Fig4. Typic Capacitance vs. Reverse

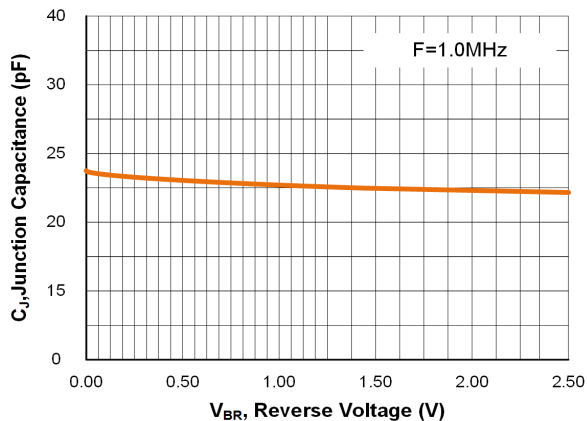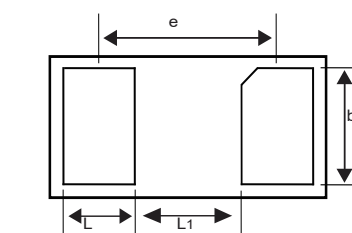

0201/DFN0603 Package Outline & Dimensions

0201/DFN0603

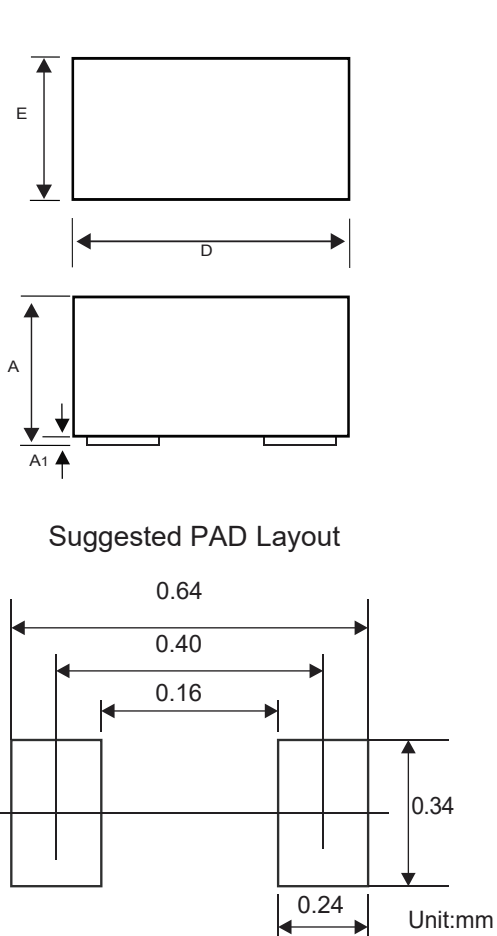

Symbol	Millimeters		
	Min	Nom	Max
A	0.270	0.300	0.340
A1	0	0.020	0.050
D	0.550	0.600	0.650
E	0.250	0.300	0.350
e	0.340REF		
L	0.140	0.180	0.240
b	0.200	0.250	0.300
L1	0.150REF		

Ordering Information

Device	Marking	Package	Quantity	Reel Size
ESD2.5V02D-C	25	0201/DFN0603	12,000pcs/Reel	7 inch

Disclaimer

UNSEMI RESERVES THE RIGHT TO MAKE CHANGE ON OUR PRODUCTS , PRODUCTS SPECIFICATION AND DATA WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

UN SEMICONDUCTOR LIMITED its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "UNSEMI") does not give any representations or warranties for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In no event shall UNSEMI be liable for any indirect, incidental, punitive, special or consequential damages (including any and all implied warranties, warranties of fitness for particular purpose, non-infringement and merchantability.) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Statements regarding the suitability of products for certain types of applications are based on UNSEMI knowledge of typical requirements that are often placed on UNSEMI products in generic applications. Such statements are not binding, statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify UNSEMI's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise agreed in writing, UNSEMI product is not designed, authorized or warranted to be suitable for use in medical life-saving, or life-sustaining application , nor in applications where failure or malfunction of a UNSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. UNSEMI and its suppliers accept no liability for inclusion or use of UNSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

All referenced brands, product names, service names and trademarks are the property of their respective owners.